

KAF-1030/3030R/3030R-S

SERVICE MANUAL

KENWOOD

© 2000-3/B51-5611-00 (K/K) 1704


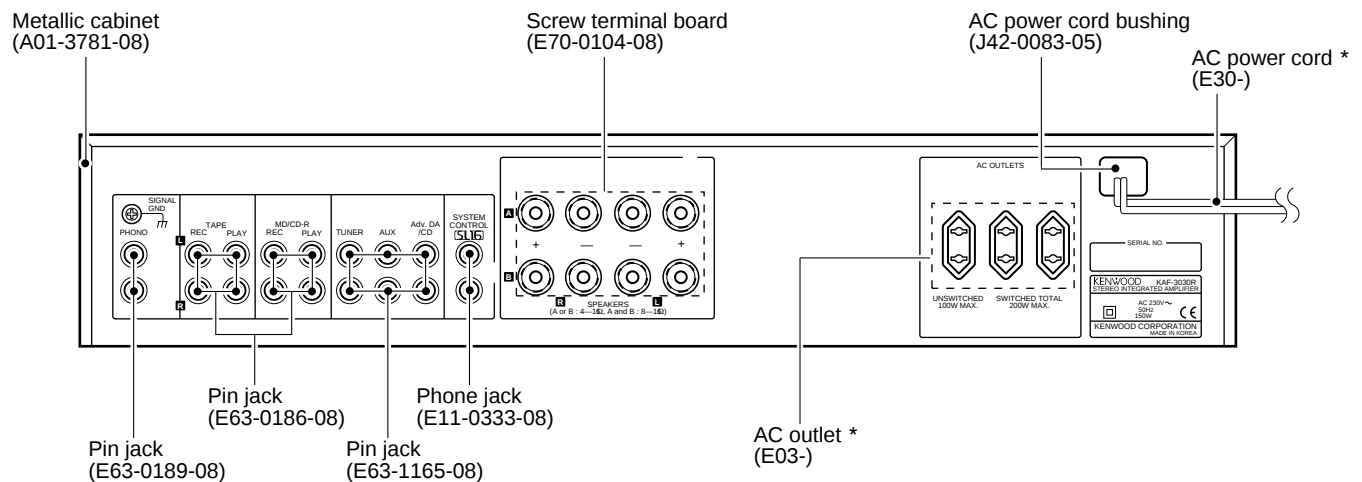


Illustration is KAF-3030R.
* Refer to parts list on page 16.

Caution: No connection of ground line if disassemble the unit.
Please connect the ground line on rear panel, PCBs, Chassis and some others.

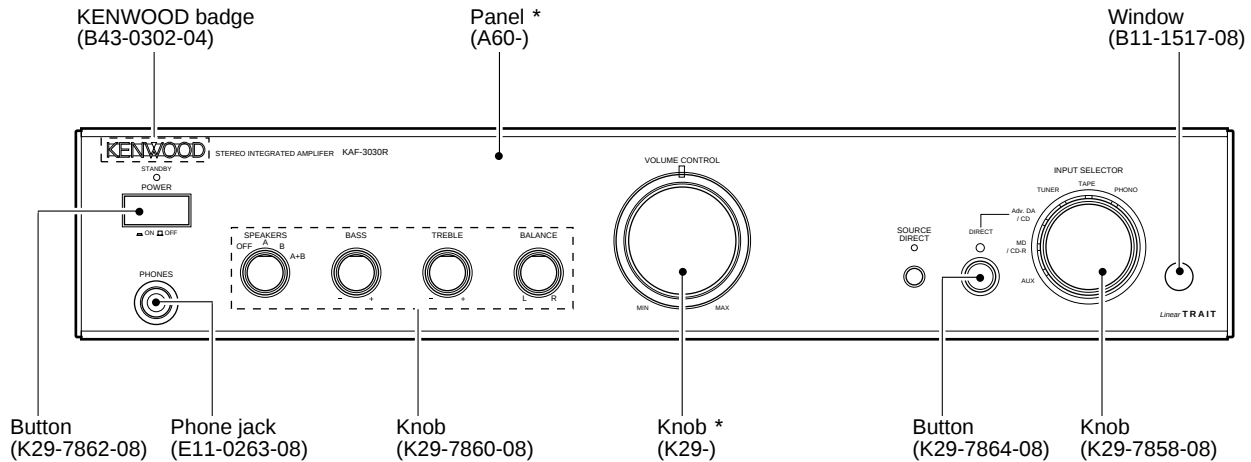

KAF-1030/3030R


CONTENTS / ACCESSORIES

Contents

CONTENTS / ACCESSORIES	2	SCHEMATIC DIAGRAM	11
CONTROLS	3	EXPLODED VIEW	15
CIRCUIT DESCRIPTION	5	PARTS LIST	16
ADJUSTMENT	6	SPECIFICATIONS	19
PC BOARD	7		


Accessories

Remote control unit (1)
(KAF-3030R only)
(A70-1429-08)



Battery cover (A09-0170-08)

Batteries (R6/SUM-3) (2)
(KAF-3030R only)



Cautions

Operation to reset

The microcomputer may fall into malfunction (impossibility to operate, erroneous display, etc.) when the power cord is unplugged while power is ON or due to an external factor. In this case, execute the following procedure to reset the microcomputer and return it to normal condition.


Set the POWER to OFF then, while holding down the SOURCE DIRECT key, set the POWER switch to ON.

- Please note that resetting the microcomputer clears the contents stored in it and returns it to the condition when it left the factory.

KAF-1030/3030R

CONTROLS

Main unit

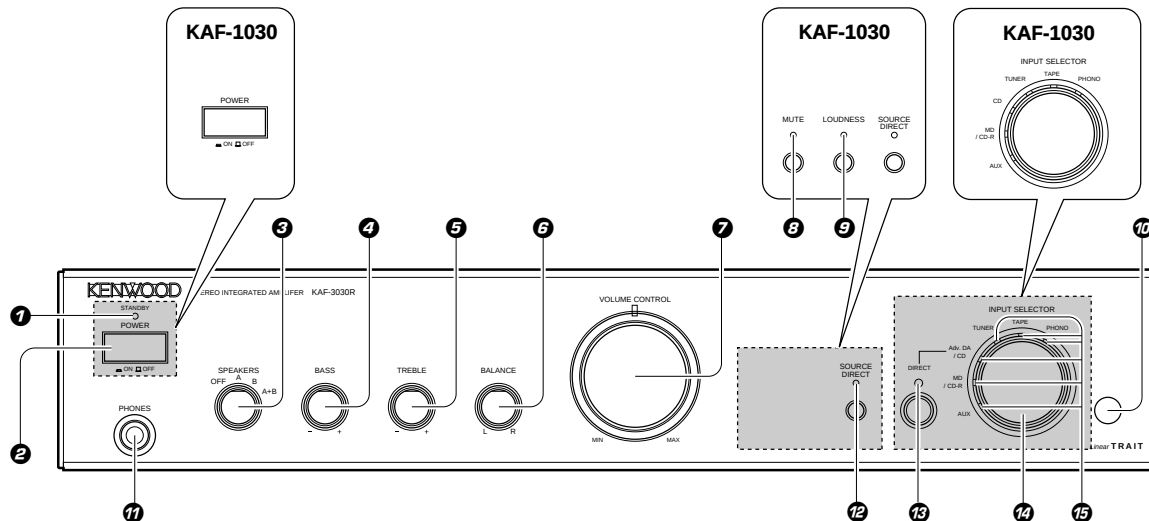

1 STANDBY indicator (KAF-3030R only)

2 POWER switch

3 SPEAKERS A / B switches

Turn to select the A and/or B speakers systems.

4 BASS knob

To adjust low frequencies.

5 TREBLE knob

To adjust high frequencies.

6 BALANCE knob

Adjust the volume balance between left and right.

7 VOLUME CONTROL knob

Adjust the volume.

8 MUTE key/indicator (KAF-1030 only)

Mute the sound temporarily.

9 LOUDNESS key/indicator (KAF-1030 only)

Use to emphasize deep bass sounds.

10 Remote Sensor (KAF-3030R only)

11 PHONES jack

Used for headphone listening.

12 SOURCE DIRECT key/indicator

To listen to a source with high quality sound.

13 Adv. DA / CD DIRECT key/indicator (KAF-3030R only)

To listen to a Advanced Digital Audio source with high quality sound.

14 INPUT SELECTOR knob

Turn to select the input sources.

15 INPUT indicator


An indicator lights for the source selected with the **INPUT SELECTOR** knob.

KAF-1030/3030R

CONTROLS

Remote control unit (KAF-3030R only)

The  part of the illustration designates keys that can be used to operate KENWOOD components connected with the system control. The rest of the illustration designates keys that have the same functions as the keys on the main unit.

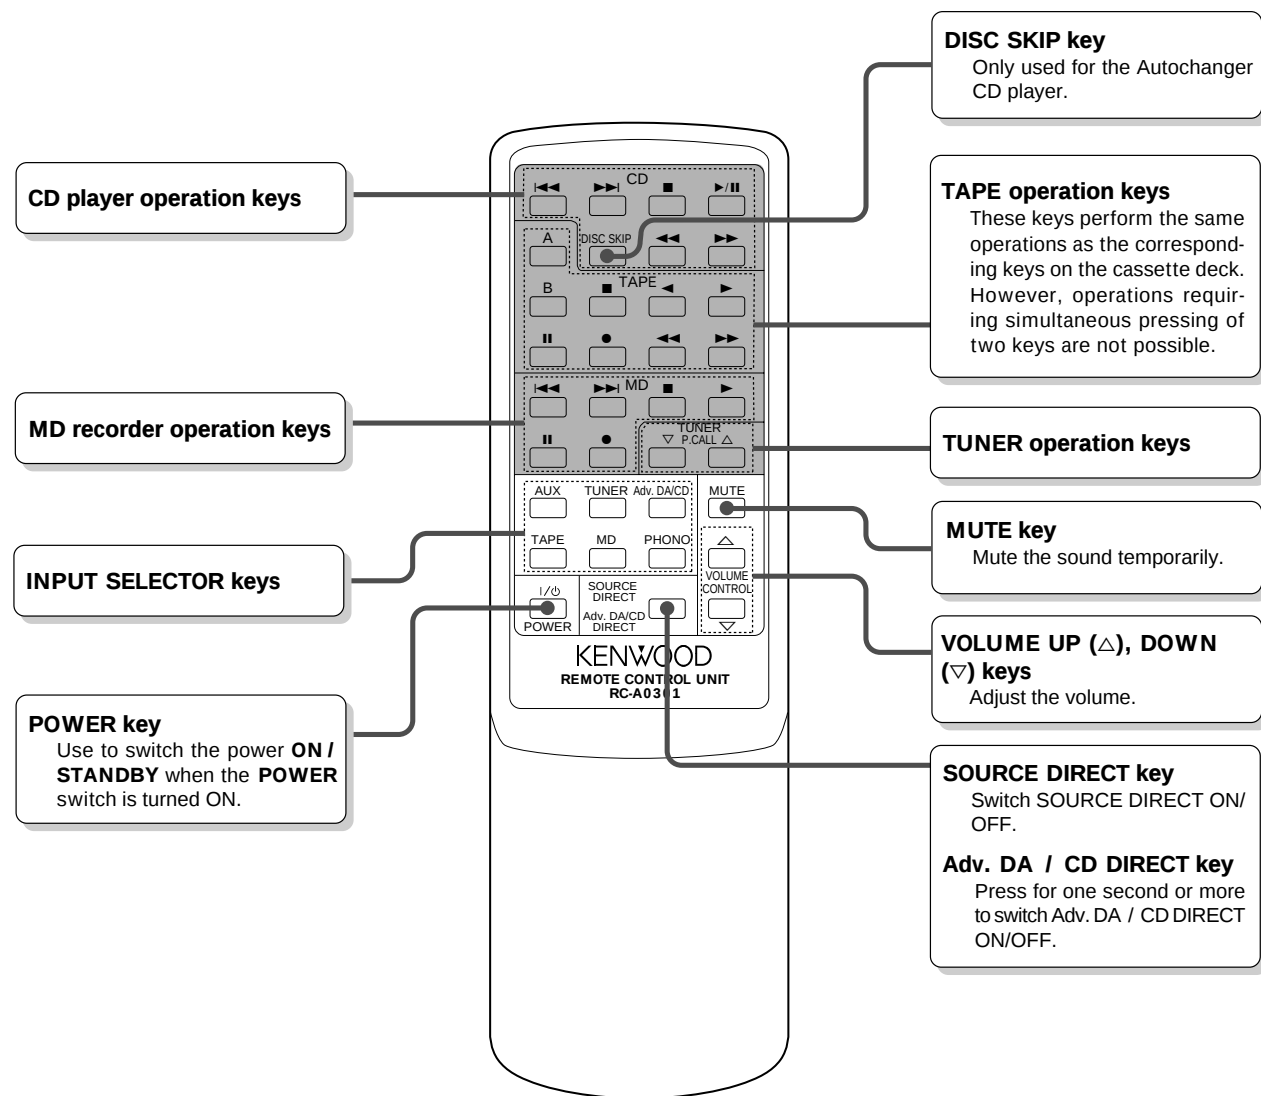

Model: RC-A0301
Infrared ray system

KAF-1030/3030R

CIRCUIT DESCRIPTIONS

1. Microprocessor

Pin description


Pin No.	Pin Name	I/O	Description	ACTIVE	
				H	L
1	VDD	-	Power supply(+5.0V).		
2	REMOCON	I	Remote control signal input. KAF-3030 only		
3	VDD	-	Power supply(+5.0V).		
4,5	NC	-	Unused.		
6	MAIN MUTE	O	Control port of audio muting.	OFF	ON
7	MD REC MUTE	O	MD REC muting control.		
8	TAPE REC MUTE	O	TAPE REC muting control.		
9	POWER RELAY	O	Control port of standby relay.		
10	SP. RELAY A	O	A speaker relay control.		
11	SP. RELAY B	O	B speaker relay control.		
12	DVD RELAY	O	DVD relay control port.		
13-15	NC	-	Unused.		
16	SP. A IN	I	Input port of A speaker selector.		
17	SP. B IN	I	Input port of B speaker selector.		
18	NC	-	Unused.		
19	STB	O	Strobe output to input selector.		
20	CLK	O	Clock output to input selector.		
21	DATA	O	Data output to input selector.		
22	SYSICON DATA	I/O	System serial data input/output. KAF-3030 only		
23	SYSICON BUSY	I/O	System serial busy input/output. KAF-3030only		
24	KEY IN	I	Input port of key signal.		
25	VOLUME DOWN	O	Control port of motor volume(down).	ON	OFF
26	VOLUME UP	O	Control port of motor volume(up).	ON	OFF
27	MD/CD-R LED	O	Control port of MD/CD-R LED.		
28	TAPE LED	O	Control port of TAPE LED.		
29	AUX LED	O	Control port of AUX LED.		
30	RESET	I	Reset signal input.		
31	EXTAL	-	10MHz oscillator.		
32	XTAL	-	10MHz oscillator.		
33	VSS	-	Ground.		
34	TUNER LED	O	Control port of TUNER LED.		
35	CD/AD-DA CD	O	Control port of CD/AD-DA CD LED.		
36	PHONO LED	O	Control port of PHONO LED.		
37	DVD DIRECT LED	O	Control port of DVD DIRECT LED.		
38	SOURCE LED	O	Control port of SOURCE LED. KAF-3030 only		
39	LOUDNESS LED	O	Control port of SOURCE LED. KAF-1030 only		
40	MUTE LED	O	Control port of MUTE LED. KAF-1030 only		
41	STNDBY LED	O	Control port of STANDBY LED. KAF-3030 only		
42	MAIN VOL. LED	O	Control port of vol. LED.		
43	LOUDNESS	O	Control port of loudness. LED. KAF-1030 only	OFF	ON
44-71	NC	-	Unused.		
72	VDD	-	Power supply(+5.0V).		
73	NC	-	Unused.		
74,75	ENCODER IN	I	Data input of encoder(input selector).		
76,77	ENCODER SP	-	Unused.		
78	POWER OFF	I	Power off signal input.	OFF	ON
79	PROTECTION	I	Detection port of protection.	OFF	ON
80	3030/1030 SEL	-	Unused.		

KAF-1030/3030R


ADJUSTMENT

No.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	AMPLIFIER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
Unless otherwise specified, the individual switches should be set as following : POWER : ON SPEAKER : B SELECTOR : CD							
1	IDLE CURRENT	—	Connect a DC voltmeter as figure CN511 (Lch), CN510 (Rch). (MAIN PCB)	VOLUME : 0	VR203 (Lch) VR204 (Rch) (MAIN PCB)	40 mV	(a)
2	OFF SET	—	Connect a DC voltmeter to speaker terminal (JACK106) as figure.	VOLUME : 0	VR201 (Lch) VR202 (Rch) (MAIN PCB)	0 mV	(b)


(a)

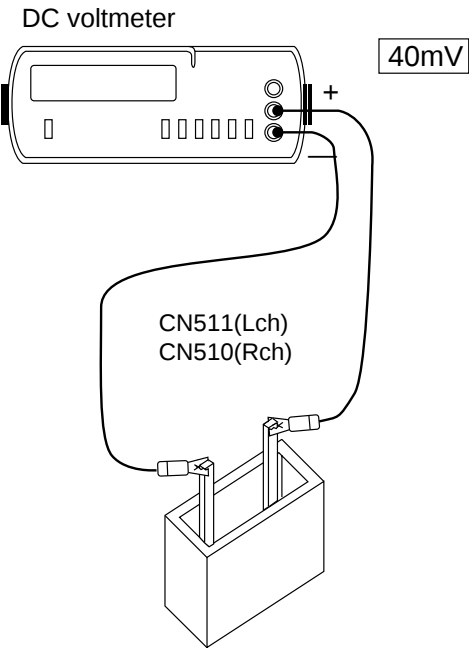

(b)











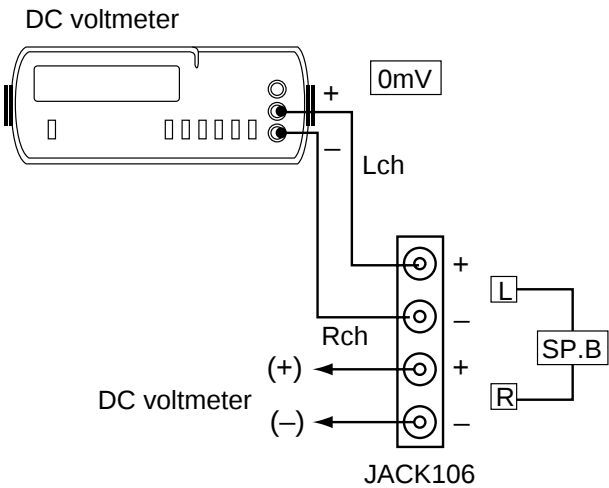


PC BOARD(Component side view)

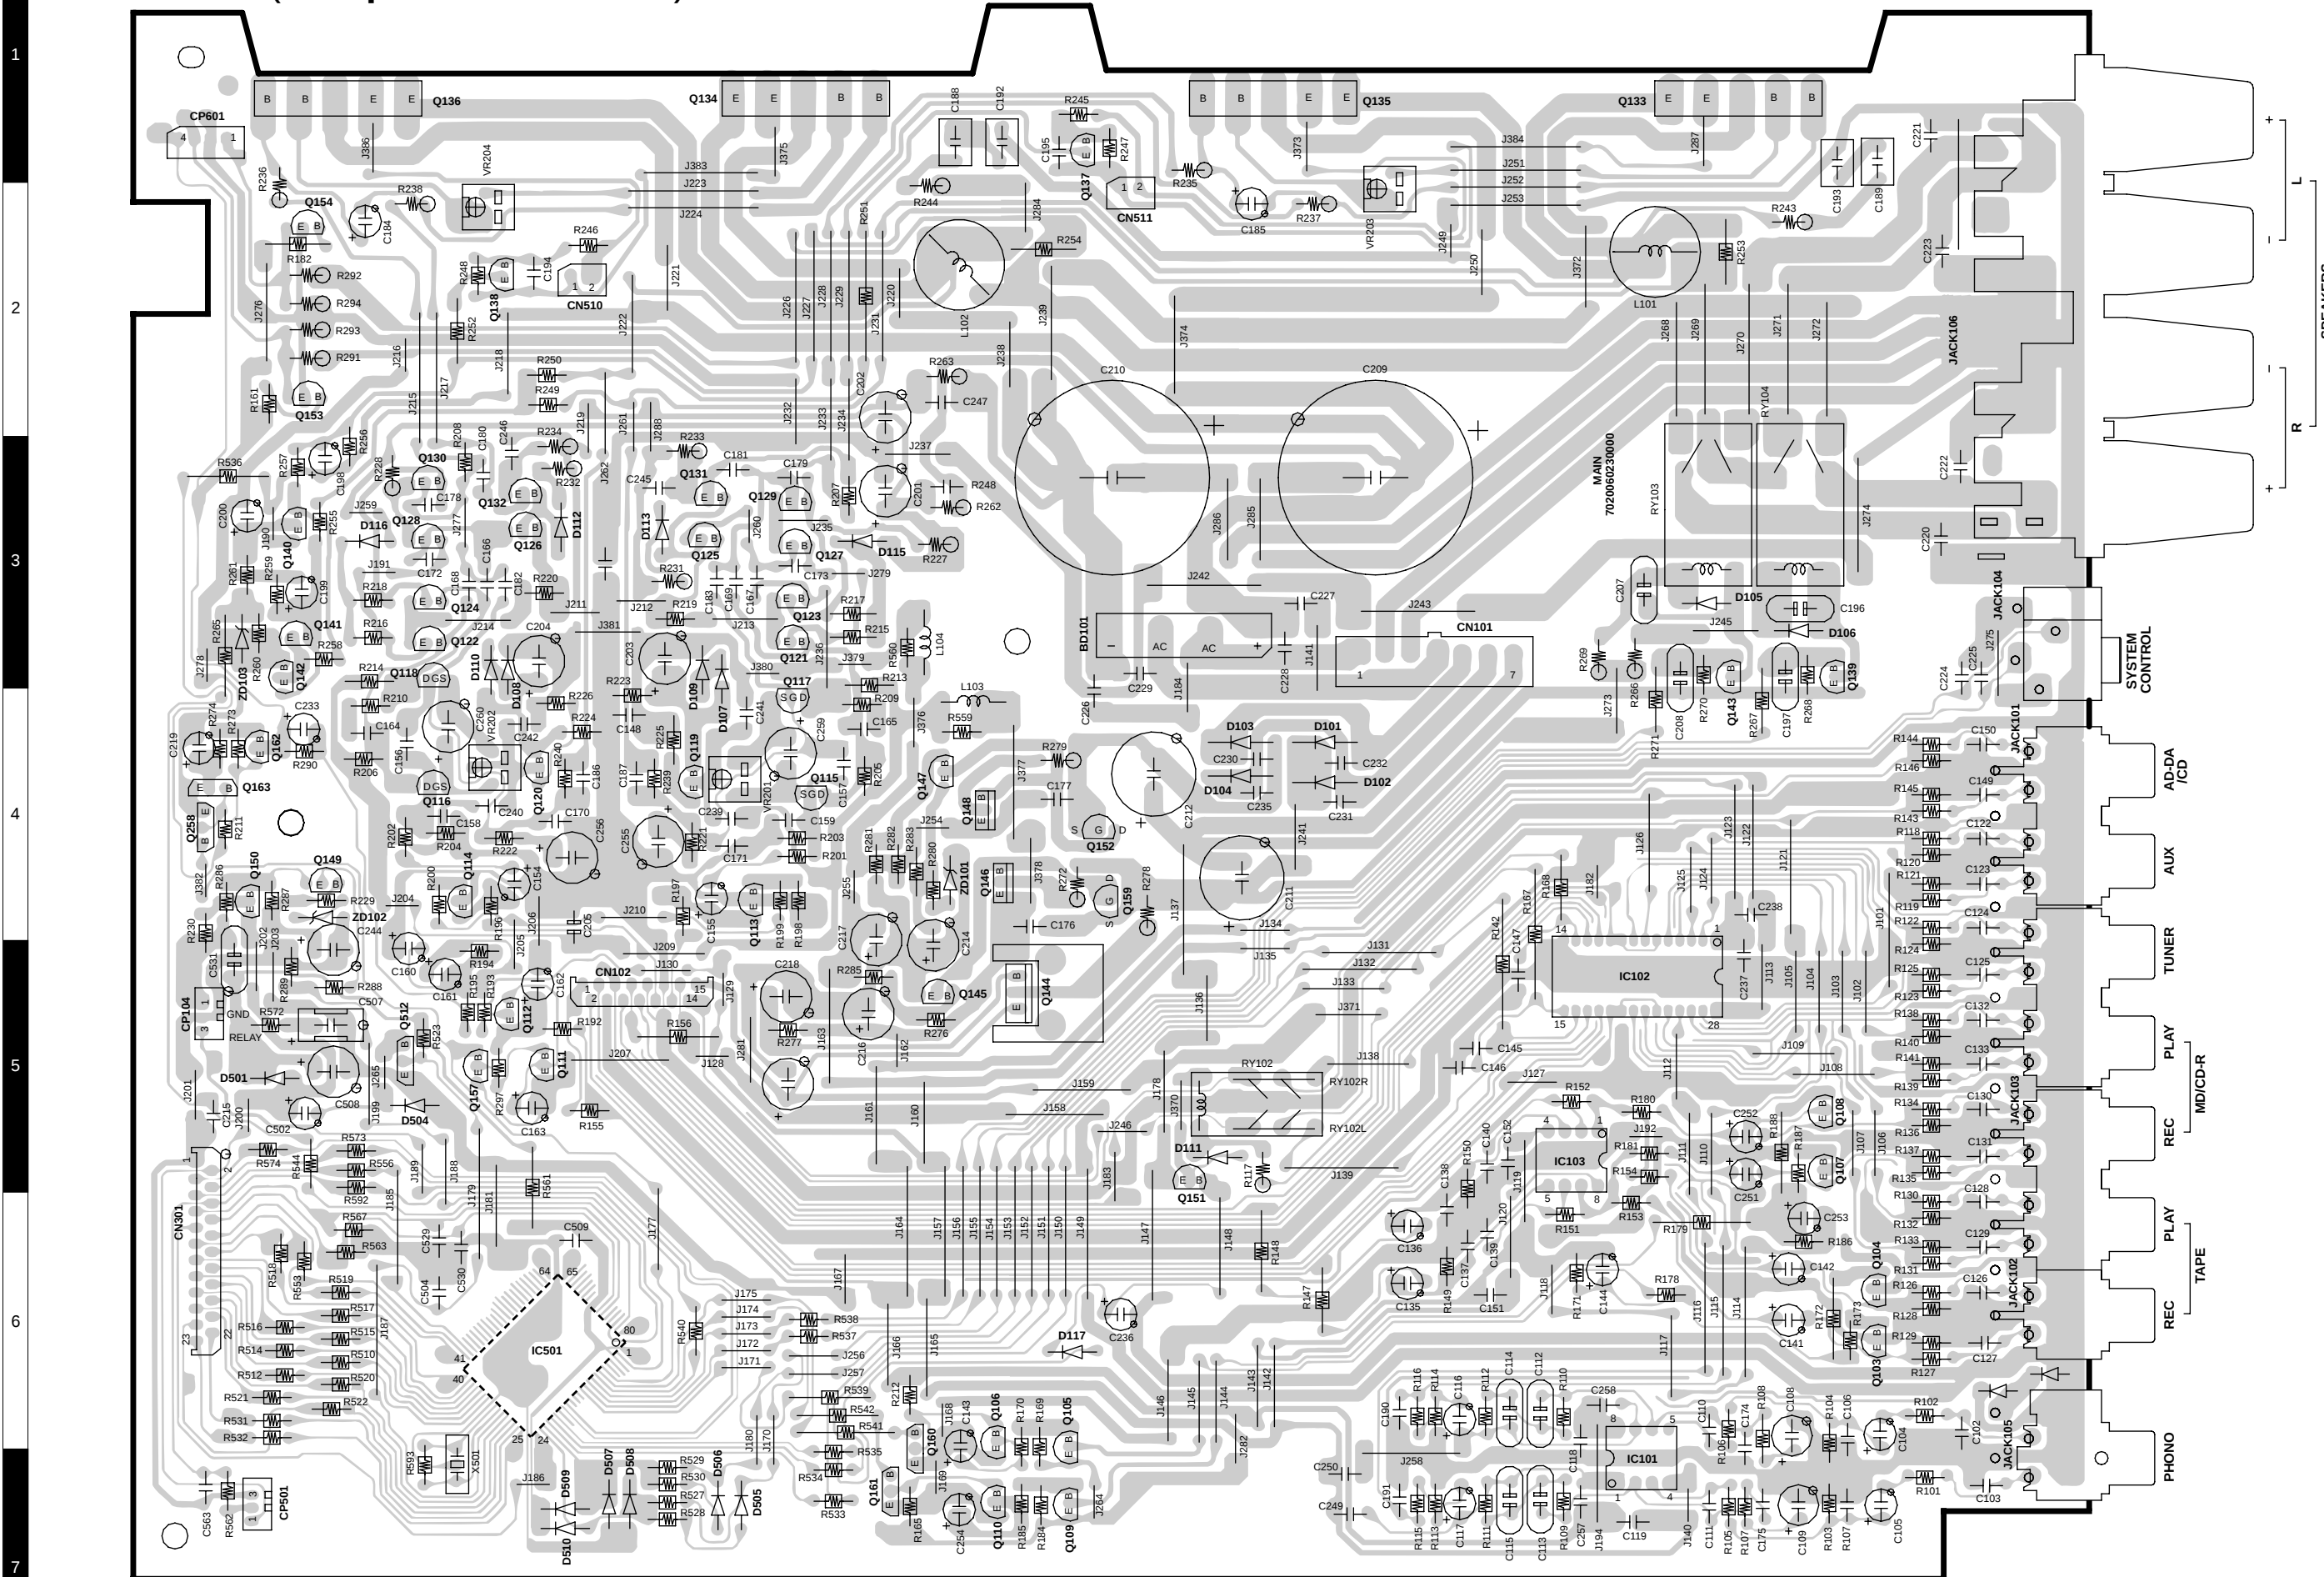


Refer to the schematic diagram for the value of resistors and capacitors.

PC BOARD(Component side view)

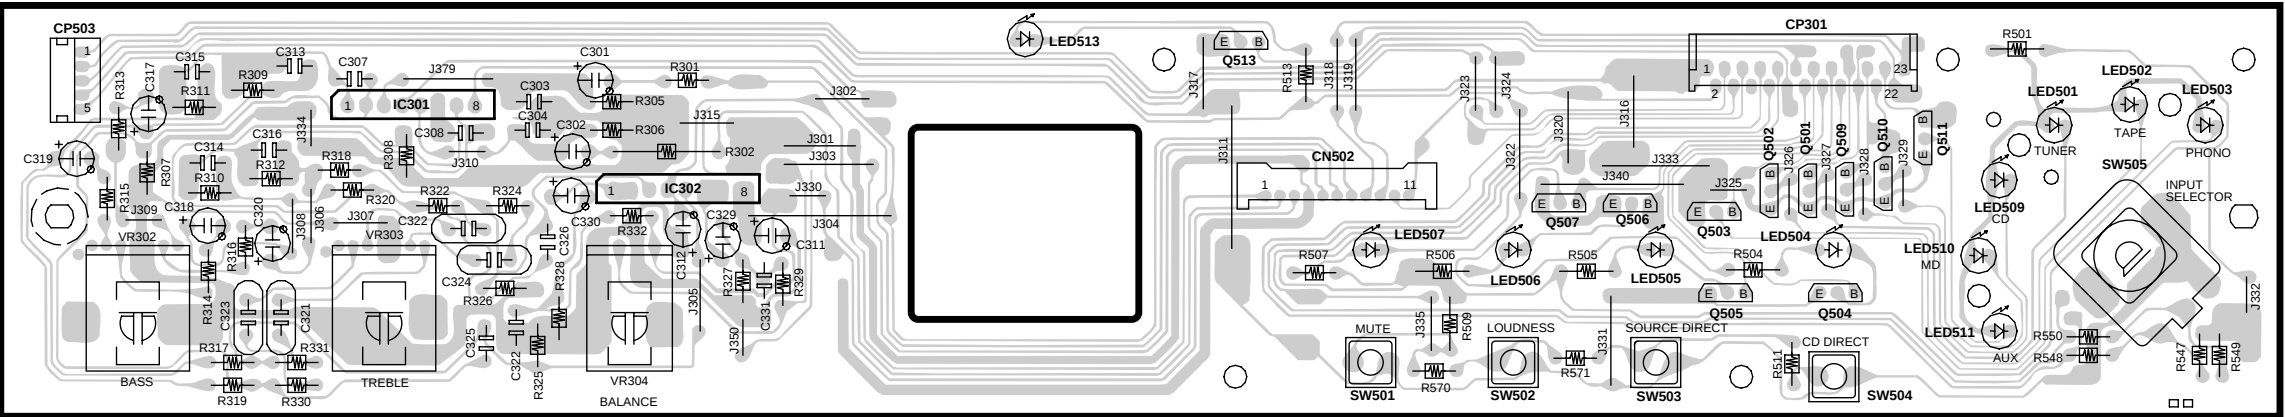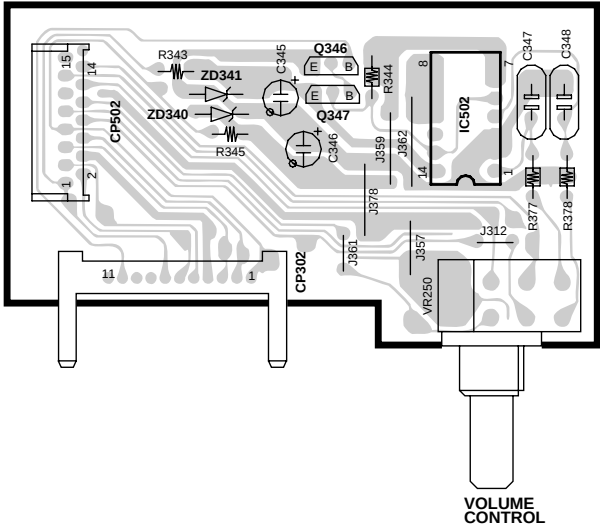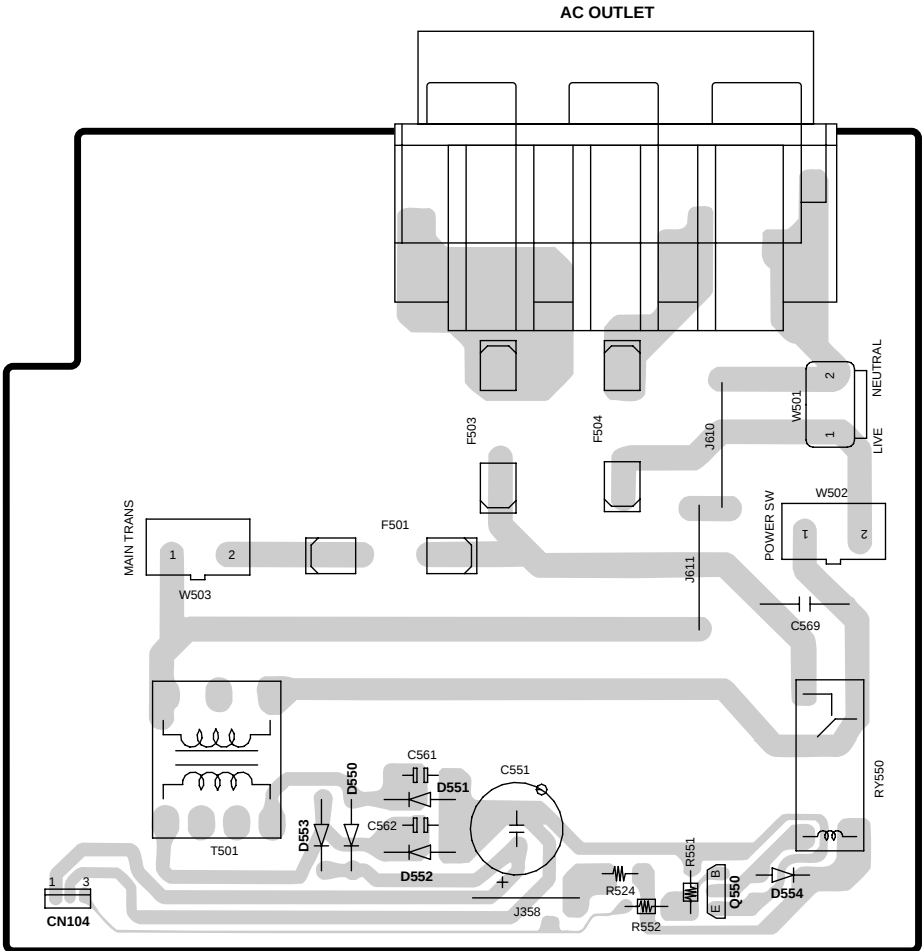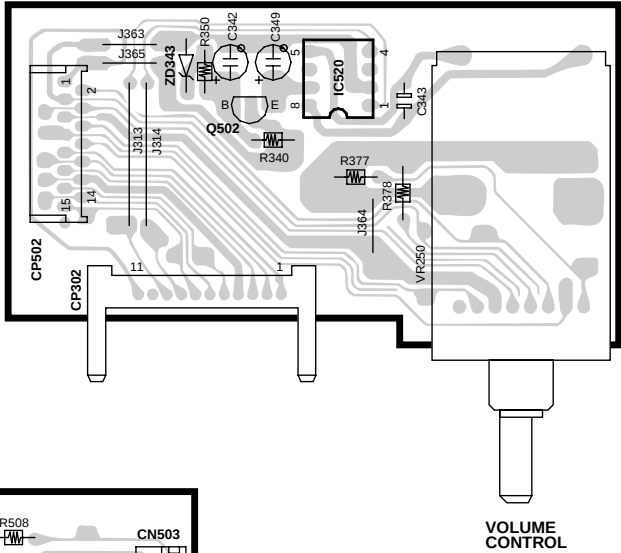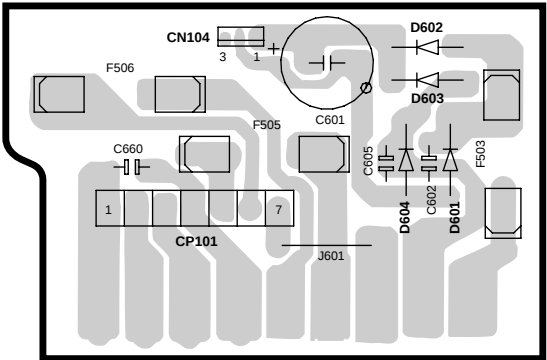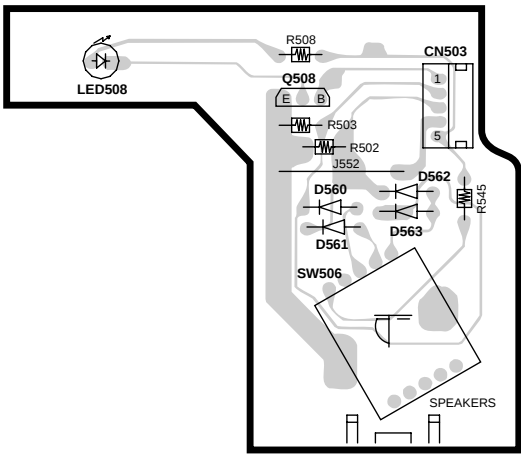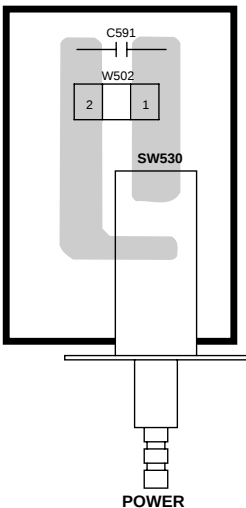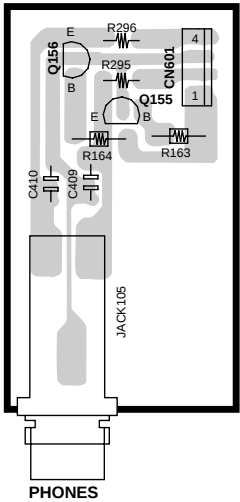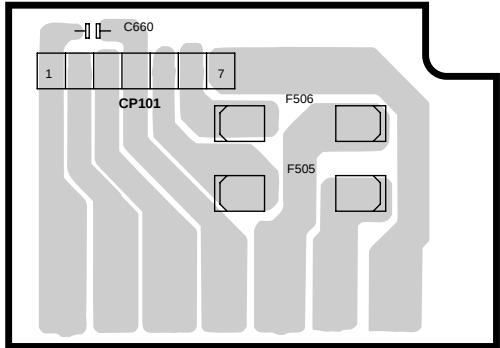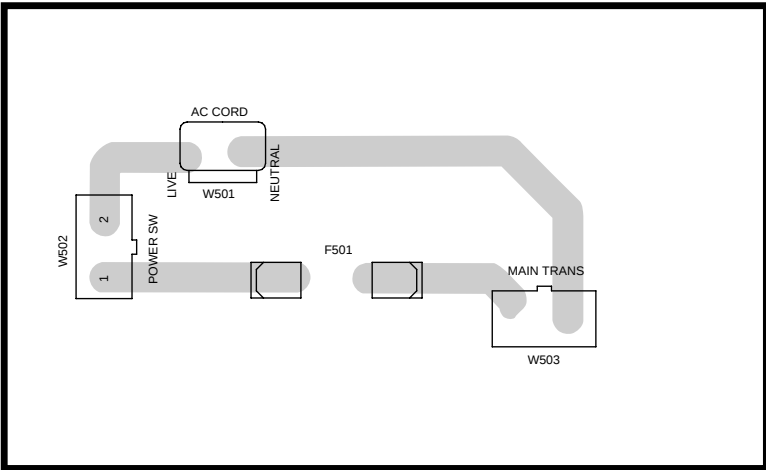

Refer to the schematic diagram for the value of resistors and capacitors.




A diagram of a 5-pin DIN connector, showing a rectangular housing with five pins extending from the bottom. The pins are numbered 1 through 5 from left to right. Pin 1 is the shortest, pin 2 is slightly longer, pin 3 is the longest, pin 4 is slightly shorter than pin 3, and pin 5 is the shortest. The housing has a small circular feature on the top left and a small rectangular feature on the top right.

A diagram of a three-core cable. It consists of a cylindrical outer jacket with three conductors extending from one end. The conductors are labeled B, C, and E from top to bottom.

A diagram of a 16-pin DIP package. The package is shown from a perspective view. The pins are numbered 8 and 4, indicating the pin count on each side of the package.




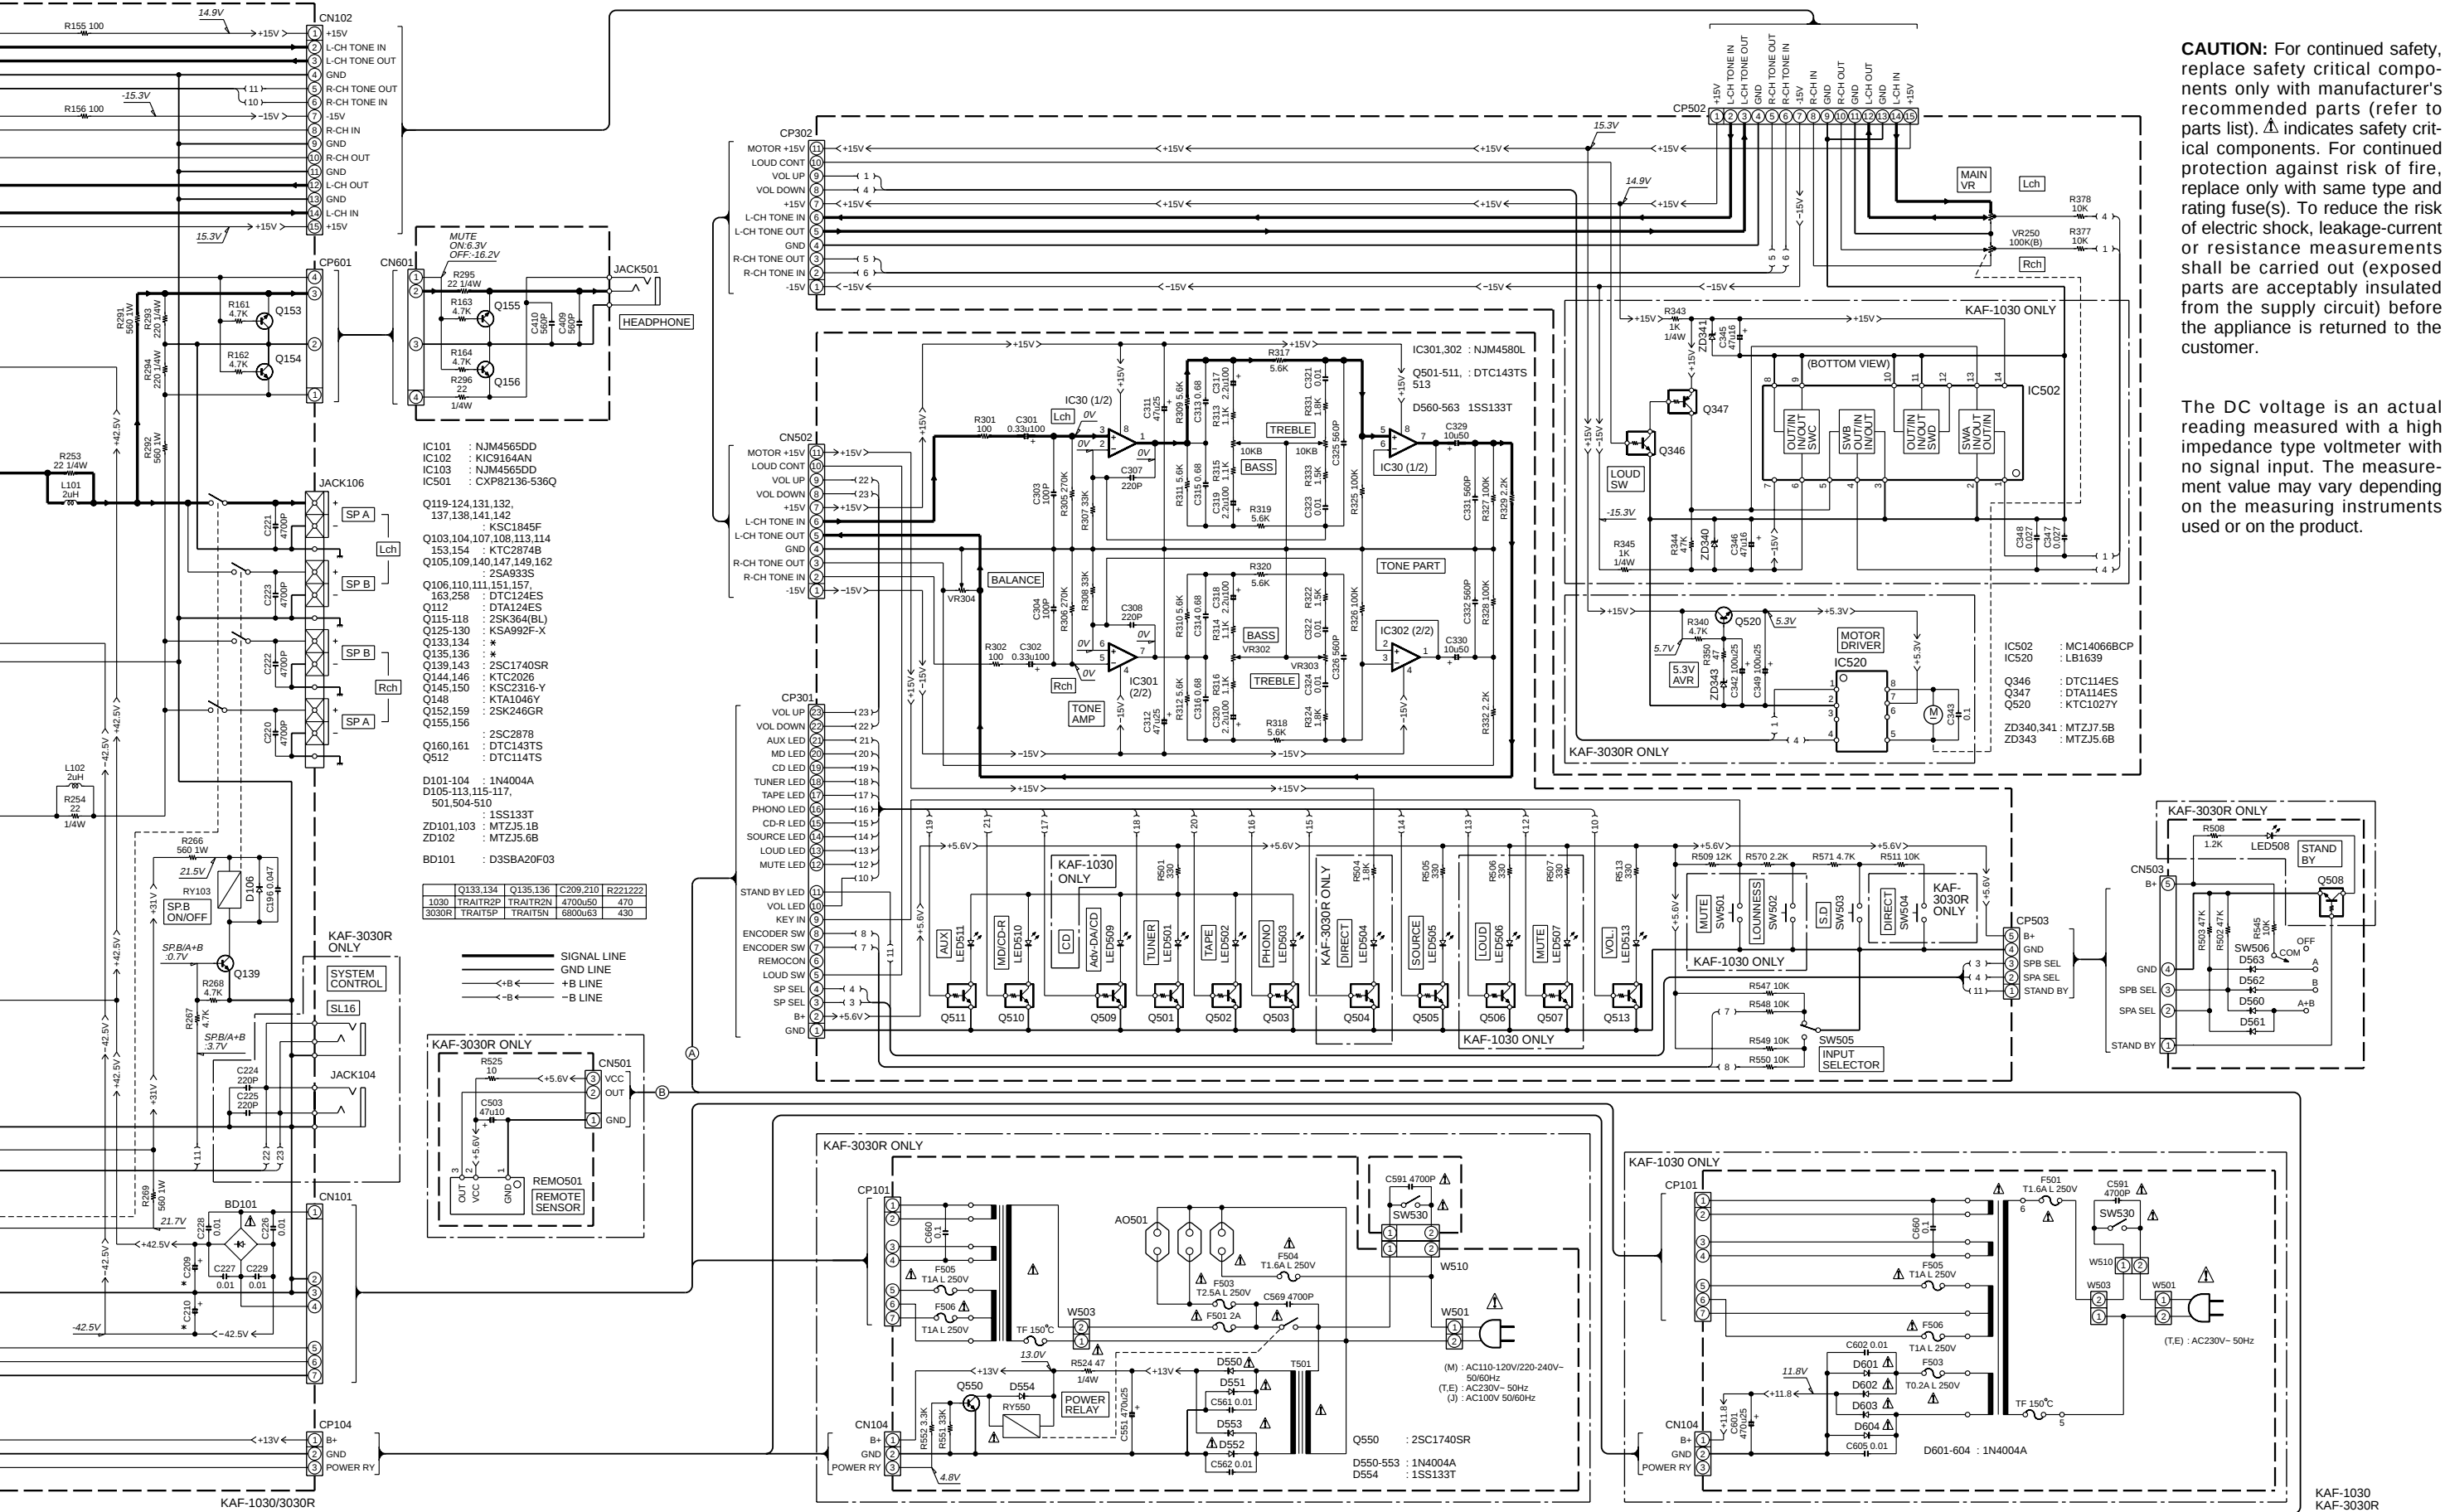

KAF-1030/3030R

EXPLODED VIEW (UNIT)

Parts with exploded numbers larger than 700 are not supplied.

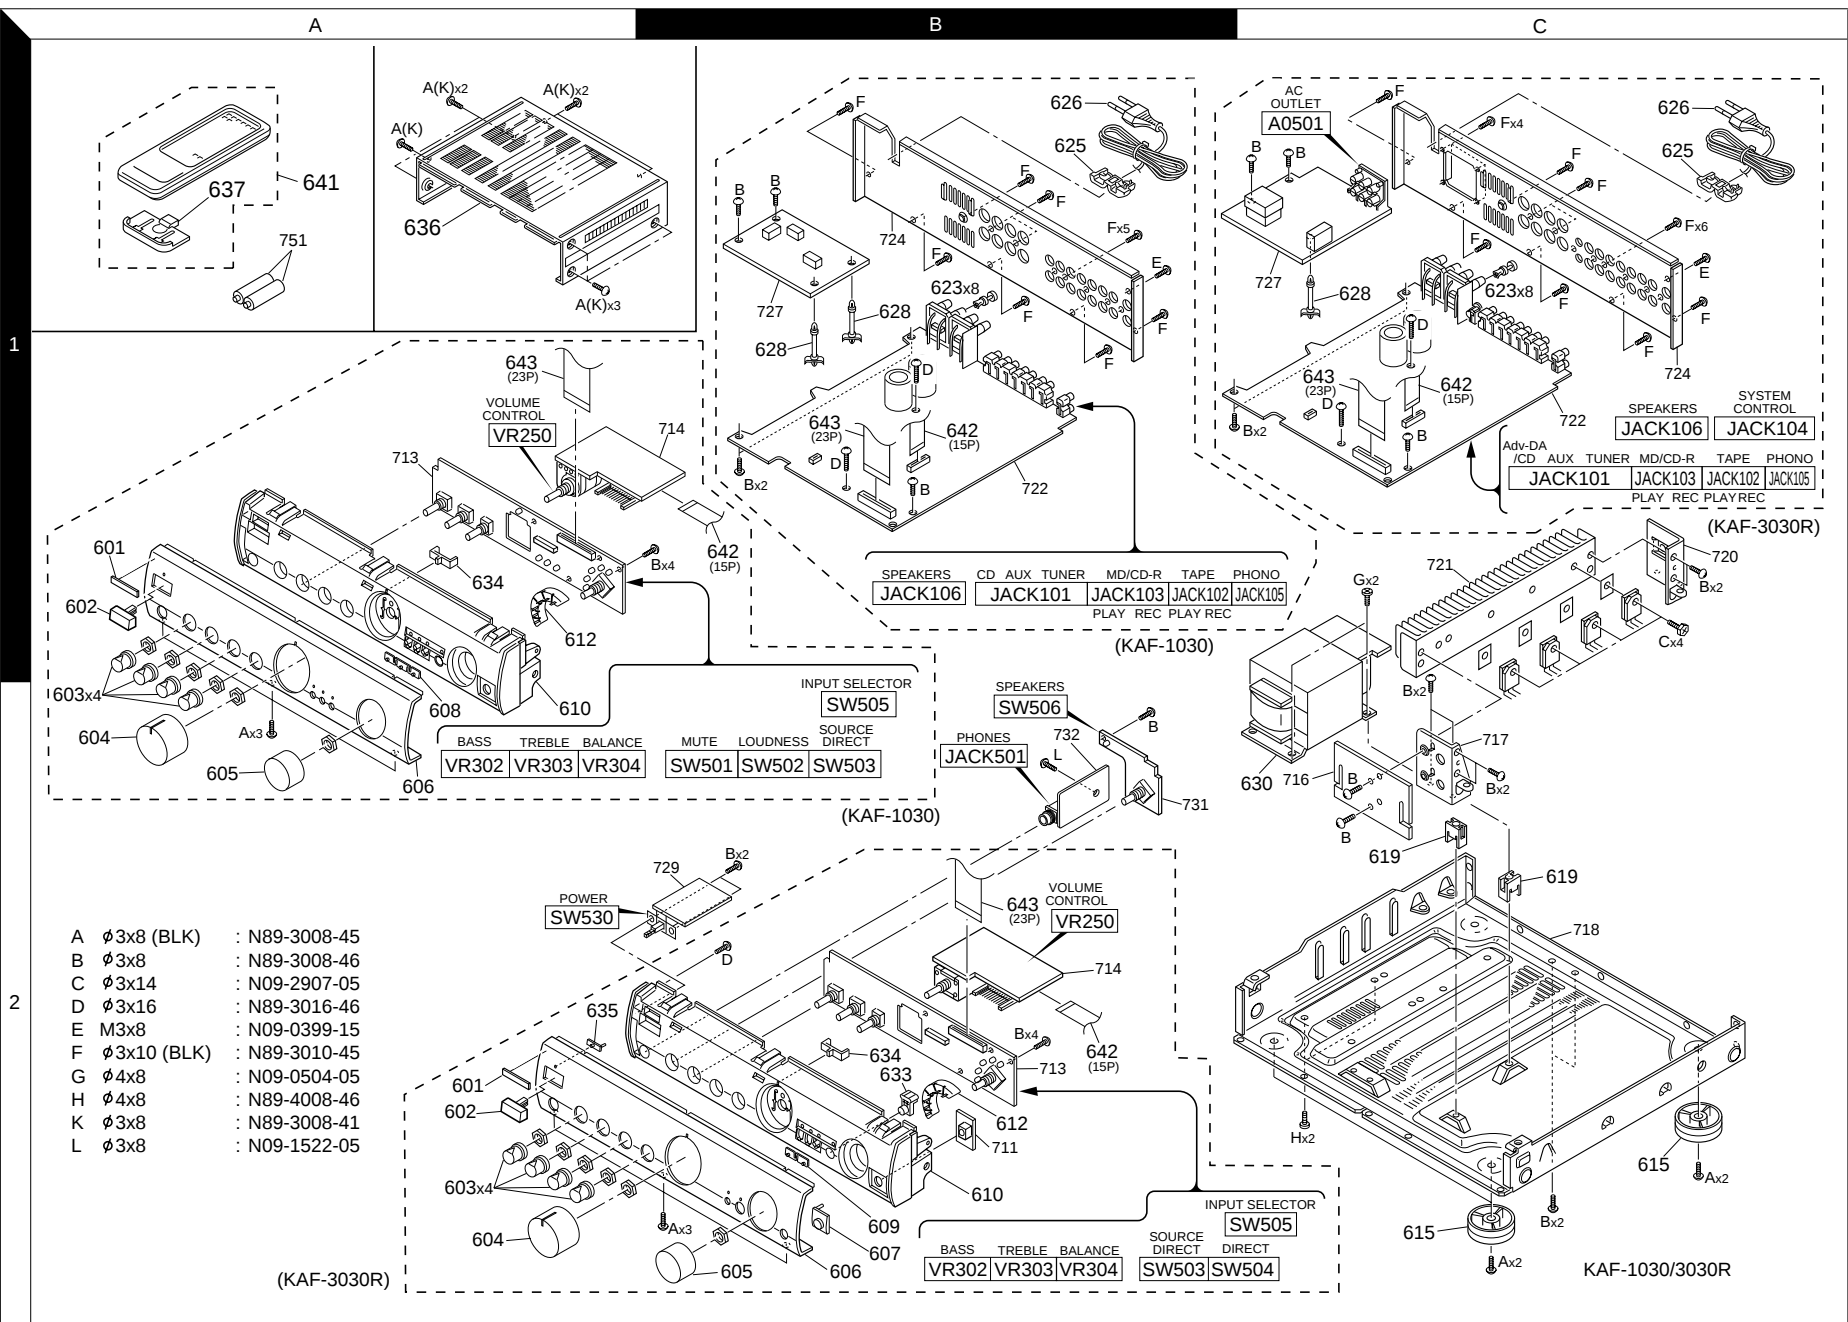

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

1

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
KAF-1030/3030R/3030R-S						
601	1A,2A	*	B43-0302-04	BADGE	5630000611010	
602	1A,2A	*	K29-7862-08	BUTTON,POWER	5090210621000	
602	1A,2A	*	K29-7863-08	BUTTON,POWER	5097210621100	3
603	2A	*	K29-7860-08	KNOB,CON	5087210271000	
603	2A	*	K29-7861-08	KNOB,CON	5087210271100	3
604	2A	*	K29-7855-08	KNOB,VOL	5087210241000	1
604	2A	*	K29-7856-08	KNOB,VOL	5087210251000	3
604	2A	*	K29-7857-08	KNOB,VOL	5087210251100	3
605	2A,2B	*	K29-7858-08	KNOB,FUN	5087210261000	
605	2B	*	K29-7859-08	KNOB,FUN	5087210261100	3
606	2A	*	A60-1895-08	PANEL	3067210298000	1
606	2B	*	A60-1896-08	PANEL	3067210298100	3
606	2B	*	A60-1897-08	PANEL	3067210298110	3
607	2B	*	B11-1517-08	WINDOW,REMOCON	5070210323000	3
608	2A	*	B19-1624-08	LENS,LOUD	3710210103000	1
609	2B	*	B19-1626-08	LENS,DIRECT	3710210123000	3
610	2A	*	A22-1847-08	FRAME	3210210081000	1
610	2B	*	A22-1848-08	FRAME	3210210081200	3
610	2B	*	A22-1849-08	FRAME	3217210081100	3
612	1A,2B	*	B19-1625-08	LENS,FUN	3710210113000	
615	2C	*	J02-1404-13	FOOT ASSY	4008000601030	
619	2C	*	J19-5725-08	SUPPORTERX2	4070001601010	
623	1B,1C	*	N29-0035-05	RIVET,SPKR	1560000112010	
625	1B,1C	*	J42-0083-05	STOPPER,AC CORD	4380210002000	
626	1B,1C	*	E30-2718-05	CORD AC	L061040011010	EES
626	1B,1C	*	E30-2892-08	CORD AC	L061000290010	TTS
628	1B,1C	*	J19-6124-08	SUPPORTER,PCB	4070020113010	
630	2C	*	L07-2901-08	POWER TRANS	8200740630010	1
630	2C	*	L07-2902-08	POWER TRANS	8200760800010	3
633	2B	*	K29-7864-08	BUTTON,DIRECT	5090210651000	3
633	2B	*	K29-7865-08	BUTTON,DIRECT	5097210651100	3
634	1A,2B	*	B19-1622-08	LENS,VOL	3710210083000	
635	2A	*	B19-1623-08	LENS,POWER	3710210093000	3
636	1A	*	A01-3781-08	CABINET	3000210116000	ET
636	1A	*	A01-3782-08	CABINET	3007210116100	3
637	1A	*	A09-0170-08	BATTERY COVER		3
641	1A	*	A70-1429-08	REMOCON(RC-A0301)	83000000320020	3
642	1B,1C	*	E35-2687-08	CABLE,FLAT,15P	L3011511500010	
643	1A,1B	*	E35-2688-08	CABLE,FLAT,23P	L3011812300010	
-		*	B46-0310-03	WARRANTY CARD	5720001980101	ET
-		*	B46-0350-00	QUESTIONAIRE	5777011230010	TTS
-		*	B60-4527-08	INST MANUAL(EN)	5707210350040	TTS
-		*	B60-4528-08	INST MANUAL(ES)	5707210350010	EES
-		*	B60-4529-08	INST MANUAL(FR)	5707210350020	EES
-		*	B60-4530-08	INST MANUAL(GE)	5707210350050	EES
-		*	B60-4531-08	INST MANUAL(IT)	5707210350060	EES
-		*	B60-4532-08	INST MANUAL(NE)	5707210350070	EES
-		*	G13-2505-08	CUSHION SNOW	6230210174000	
-		*	H25-1573-08	POLY BAG,SET	6337000409030	
-		*	H25-1601-08	POLY BAG	6337000240010	EES
-		*	H50-3620-08	BOX GIFT	6007210170000	ET
-		*	H50-3622-08	BOX GIFT	6007210170020	3
-		*	H50-3623-08	BOX GIFT	6007210170010	3

L : Scandinavia
Y : PX(Far East,Hawaii)
Y : AAFES(Europe)

K : USA
T : England
X : Australia

P : Canada
E : Europe
Q : Russia

R : Mexico
G : Germany
H : Korea

C : China
V : China(Shanghai)
M : Other Areas

I : Malaysia
S : SILVER

1 : KAF-1030
3 : KAF-3030R

Δ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

2

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
ELECTRICAL PARTS						
LED501-3		*	B30-2545-05	LED,P15-RD	K500052016010	3
LED504		*	B30-2551-05	LED,BLUE	K500036000010	
LED505		*	B30-2545-05	LED,P15-RD	K500052016010	1
LED506,7		*	B30-2545-05	LED,P15-RD	K500052016010	3
LED508		*	B30-2545-05	LED,P15-RD	K500052016010	
LED509-11		*	B30-2524-05	LED,P15-RD	K500052016010	
LED513		*	B30-2524-05	LED,P15-RD	K500052016010	
C102,103			CC45FSL1H330J	CERAMIC	33PF	J
C104,105			CE04KW1H100M	ELECTRO	10UF	50WV
C106,107			CC45FSL1H181J	CERAMIC	180PF	J
C108,109			CE04KW1E101M	ELECTRO	100UF	25WV
C110,111			CC45FSL1H221J	CERAMIC	220PF	J
C112,113			CQ92FM1H123J	MYLAR	0.012UF	J
C114,115			CQ92FM1H332J	MYLAR	3300PF	J
C116,117			CE04KW1H100M	ELECTRO	10UF	50WV
C118			CC45FSL1H101J	CERAMIC	100PF	J
C119			CK45FB1H103K	CERAMIC	0.010UF	K
C122-133			CC45FSL1H151J	CERAMIC	150PF	J
C135,136			CE04KW2A2R2M	ELECTRO	2.2UF	100WV
C137,138			CC45FSL1H221J	CERAMIC	220PF	J
C139,140			CC45FSL1H101J	CERAMIC	100PF	J
C141-144			CE04KW2A2R2M	ELECTRO	2.2UF	100WV
C145-147			CC45FSL1H221J	CERAMIC	220PF	J
C148			CC45FSL1H101J	CERAMIC	100PF	J
C149,150			CC45FSL1H151J	CERAMIC	150PF	J
C151			CK45FB1H103K	CERAMIC	0.010UF	K
C152			CC45FSL1H101J	CERAMIC	100PF	J
C154,155			CE04KW1H2R2M	ELECTRO	2.2UF	50WV
C156			CC45FSL1H120J	CERAMIC	12PF	J
C157			CC45FSL1H100D	CERAMIC	10PF	D
C158,159			CC45FSL1H101J	CERAMIC	100PF	J
C160			CE04KW1H100M	ELECTRO	10UF	50WV
C161			CE04KW2A010M	ELECTRO	1.0UF	100WV
C162			CE04KW1C470M	ELECTRO	47UF	16WV
C163			CE04KW2A010M	ELECTRO	1.0UF	100WV
C164,165			CK45FB1H821K	CERAMIC	820PF	K
C166,167			CC45FSL1H390J	CERAMIC	39PF	J
C168,169			CC45FSL1H220J	CERAMIC	22PF	J
C170,171			CC45FSL1H221J	CERAMIC	220PF	J
C172,173			CC45FSL1H220J	CERAMIC	22PF	J
C174,175			CC45FSL1H221J	CERAMIC	220PF	J
C176,177			CC45FSL1H101J	CERAMIC	100PF	J
C178,179			CC45FSL1H220J	CERAMIC	22PF	J
C180,181			CK45FB1H104Z	CERAMIC	0.10UF	Z
C182,183			CC45FSL1H020C	CERAMIC	2.0PF	C
C184,185			CE04KW1H220M	ELECTRO	22UF	50WV
C186,187			CC45FSL1H080D	CERAMIC	8.0PF	D
C188,189			CQ92FM1H104J	MYLAR	0.10UF	J
C190,191			CQ92FM1H392J	MYLAR	3900PF	J
C192,193			CQ92FM1H104J	MYLAR	0.10UF	J
C194,195			CK45FB1H222Z	CERAMIC	2200PF	Z
C196			CQ92FM1H473J	MYLAR	0.047UF	J

L : Scandinavia
Y : PX(Far East,Hawaii)
Y : AAFES(Europe)

K : USA
T : England
X : Australia

P : Canada
E : Europe
Q : Russia

R : Mexico
G : Germany
H : Korea

C : China
V : China(Shanghai)
M : Other Areas

I : Malaysia
S : SILVER

1 : KAF-1030
3 : KAF-3030R

Δ indicates safety critical components .

PARTS LIST

KAF-1030/3030R

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

3

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C198 C199 C200 C201,202 C203,204			CE04KW2A010M CE04KW1A101M CE04KW2A010M CE04KW1J470M CE04KW0J471M	ELECTRO 1.0UF 100WV ELECTRO 100UF 10WV ELECTRO 1.0UF 100WV ELECTRO 47UF 63WV ELECTRO 470UF 6.3WV		
C205 C207 C209,210 C209,210 C211,212		*	CC45FSL1H101J CQ92FM1H473J C90-3939-08 C90-3940-08 CE04KW1H471M	CERAMIC 100PF J MYLAR 0.047UF J ELECTRO 4700UF 50WV ELECTRO 6800UF 63WV ELECTRO 470UF 50WV		1 3
C214 C215 C216,217 C218 C219		*	CE04KW1E101M CK45FB1H103K CE04KW1E101M CE04KW1E101M CE04KW2A2R2M	ELECTRO 100UF 25WV CERAMIC 0.010UF K ELECTRO 100UF 25WV ELECTRO 100UF 25WV ELECTRO 2.2UF 100WV		
C220-223 C224,225 C226-232 C233 C235			CQ92FM1H472J CC45FSL1H221J CK45FB2H103Z CE04KW2A2R2M CK45FB2H103Z	MYLAR 4700PF J CERAMIC 220PF J CERAMIC 0.010UF Z ELECTRO 2.2UF 100WV CERAMIC 0.010UF Z		3
C236 C237 C238 C239 C240			CE04KW2A010M CC45FSL1H101J CK45FB1H103K CC45FSL1H070C CC45FSL1H060D	ELECTRO 1.0UF 100WV CERAMIC 100PF J CERAMIC 0.010UF K CERAMIC 7.0PF C CERAMIC 6.0PF D		3
C241 C242 C244 C245-248 C249			CC45FSL1H030C CC45FCH1H040C CE04KW1C470M CC45FSL1H101J CC45FSL1H221J	CERAMIC 3.0PF C CERAMIC 4.0PF C ELECTRO 47UF 16WV CERAMIC 100PF J CERAMIC 220PF J		
C250 C251-254 C255,256 C257 C258			CC45FSL1H181J CE04KW2A2R2M CE04KW1A221M CC45FSL1H221J CC45FSL1H181J	CERAMIC 180PF J ELECTRO 2.2UF 100WV ELECTRO 220UF 10WV CERAMIC 220PF J CERAMIC 180PF J		
C259,260 C301,302 C303,304 C307,308 C311,312			CE04KW1E101M CE04KW2AR33M CC45FSL1H101J CC45FCH1H221J CE04KW1E470M	ELECTRO 100UF 25WV ELECTRO 0.33UF 100WV CERAMIC 100PF J CERAMIC 220PF J ELECTRO 47UF 25WV		
C313-316 C317-320 C321-324 C325,326 C329,330			CQ92FM1H684J CE04KW2A2R2M CQ92FM1H103J CK45FB1H561J CE04KW1H100M	MYLAR 0.68UF J ELECTRO 2.2UF 100WV MYLAR 0.010UF J CERAMIC 560PF J ELECTRO 10UF 50WV		
C331,332 C342 C343 C345,346 C347,348			CK45FB1H561J CE04KW1E101M CK45FB1H104Z CE04KW1C470M CQ92FM1H273J	CERAMIC 560PF J ELECTRO 100UF 25WV CERAMIC 0.10UF Z ELECTRO 47UF 16WV MYLAR 0.027UF J		3 3 3 1 1
C349 C409,410 C502 C503 C504			CE04KW1E101M CK45FB1H561J CE04KW2A010M CE04KW1A470M CK45FB1H103K	ELECTRO 100UF 25WV CERAMIC 560PF J ELECTRO 1.0UF 100WV ELECTRO 47UF 10WV CERAMIC 0.010UF K		3 3

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia 1 : KAF-1030
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai) S : SILVER 3 : KAF-3030R
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

4

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C507 C508 C509 C529,530 C531			C90-3741-08 CE04KW1A331M CQ92FM1H103J CK45FB1H102Z CQ92FM1H102J	BACKUP C 0.047F 5.5WV ELECTRO 330UF 10WV MYLAR 0.010UF J CERAMIC 1000PF Z MYLAR 1000PF J		
C551 C561,562 C563 C569 C591		*	CE04KW1E471M CK45FB2H103Z CC45FSL1H331J C91-1571-08 C91-1571-08	ELECTRO 470UF 25WV CERAMIC 0.010UF Z CERAMIC 330PF J CERAMIC 0.0047UF 250VAC CERAMIC 0.0047UF 250VAC		3 3 3
C601 C602 C605 C660			CE04KW1E471M CK45FB2H103Z CK45FB2H103Z CK45FB1E104Z	ELECTRO 470UF 25WV CERAMIC 0.010UF Z CERAMIC 0.010UF Z CERAMIC 0.10UF Z		1 1 1
Δ AO501 Δ AO501 CN102 CN301 CP301		*	E03-0322-08 E03-0338-08 E40-8703-08 E40-8704-08 E40-8702-08	SOCKET,POWER G435000150000 SOCKET,POWER G435000160020 CN,FPC,15P L131520451545 CN,FPC,23P L131520452345 CN,FPC,23P L131520442345	TTS EES	3 3
CP502 JACK101 JACK101 JACK102,103 JACK104		*	E40-8701-08 E63-0187-08 E63-1165-08 E63-0186-08 E11-0333-08	CN,FPC,15P L131520441545 RCA,6P G603060046020 RCA,6P G603060046070 RCA,4P G602040045000 JACK,D3.5 G401496000010		1 3 3
JACK105 JACK106 JACK501			E63-0189-08 E70-0104-08 E11-0263-08	RCA,2P G601020044000 BOARD SCREW,8P G61408103600A JACK,D6.5 G402038400040		
Δ F501 Δ F501 Δ F503 Δ F503 Δ F504			F05-1623-05 F06-2021-05 F05-2015-05 F05-2525-05 F05-1623-05	FUSE,1.6A G650162251160 FUSE,2A G650202251160 FUSE,0.2A G650201251160 FUSE,2.5A G650252251160 FUSE,1.6A G650162251160		1 3 1 3 3
Δ F505,506			F06-1022-05	FUSE,1A G650102251160		
L101,102 L103,104 T501 X501			L39-1374-08 L40-3301-17 L07-1987-08 L78-0294-05	COIL,2UH D310030000010 COIL,33UH D330330700520 POWER TRANS 8200280004000 RESONATOR E830100000050		3
R117 R227,228 R230 R231-234 R235-238			RN14BK2E2200F RN14BK2E2200F RD14BB2C470J RN14BK2E2200F RN14BK2E22R0F	RN 220 F 1/4W RN 220 F 1/4W RD 47 J 1/6W RN 220 F 1/4W RN 22 F 1/4W		3
R243,244 R262 R263 R266 R269			RS14GB3A100J RN14BK2E39R0F RN14BK2E22R0F RS14GB3A561J RS14GB3A561J	FL-PROOF RS 10 J 1W RN 39 F 1/4W RN 22 F 1/4W FL-PROOF RS 560 J 1W FL-PROOF RS 560 J 1W		
Δ R272 Δ R278 Δ R279 R291,292 R293,294			RN14BK2E47R0F RN14BK2E47R0F RN14BK2E47R0F RS14GB3A561J RN14BK2E2200F	RN 47 F 1/4W RN 47 F 1/4W RN 47 F 1/4W FL-PROOF RS 560 J 1W RN 220 F 1/4W		
R295,296 R343			RN14BK2E22R0F RN14BK2E1001F	RN 22 F 1/4W RN 1.00K F 1/4W		1

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia 1 : KAF-1030
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai) S : SILVER 3 : KAF-3030R
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas Δ indicates safety critical components .

PARTS LIST

KAF-1030/3030R

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
△ R345			RN14BK2E1001F	RN 1.00K F 1/4W		1
R524			RN14BK2E47R0F	RN 47 F 1/4W		3
VR201,202			R12-0604-05	VR,SEMI C544101015100		
VR203,204			R12-0606-05	VR,SEMI C544331015010		
VR250		*	R39-0029-08	VR,ROTARY C455121405100		1
VR250		*	R39-0030-08	VR,ROTARY C495121400260		3
VR302,303		*	R39-0028-08	VR,ROTARY C454121300400		
VR304		*	R39-0027-08	VR,ROTARY C452112400150		
RY102		*	S76-0113-08	RELAY G680000250010		3
RY103,104			S76-0076-05	RELAY G680242000000		
RY550			S76-0090-05	RELAY G680090502010		3
SW501,502			S70-0044-08	SW,TACT G180215050010		1
SW503			S70-0044-08	SW,TACT G180215050010		
SW504			S70-0044-08	SW,TACT G180215050010		3
SW505			T99-0643-08	SW,ENCODER G121161220010		
SW506		*	S60-0038-08	SW,ROTARY G120141200010		
SW530		*	S68-0131-08	SW,PUSH G000122006030		
△ BD101		*	D3SBA20F03	DIODE,5A		
△ D101-104			1N4004A	DIODE		
D105-110			1SS133T	DIODE		3
D111			1SS133T	DIODE		
D112,113			1SS133T	DIODE		
D115,116			1SS133T	DIODE		3
D117			1SS133T	DIODE		
D501			1SS133T	DIODE		3
D504			1SS133T	DIODE		
D505-510			1SS133T	DIODE		3
△ D550-553			1N4004A	DIODE		3
D554			1SS133T	DIODE		3
D560-563			1SS133T	DIODE		
△ D601-604			1N4004A	DIODE		1
IC101			NJM4565DD	IC		
IC102			KIC9164AN	IC		
IC103			NJM4565DD	IC		
IC301,302			NJM4580L	IC(OP AMP X2)		
IC501		*	CXP82316-536Q	IC		
IC502			MC14066BCP	IC(BILATERAL SWITCH X4)		1
IC520		*	LB1639	IC		3
Q103,104		*	KTC2874B	TRANSISTOR		
Q105			2SA933S	TRANSISTOR		
Q106			DTC124ES	TRANSISTOR		
Q107,108		*	KTC2874B	TRANSISTOR		
Q109			2SA933S	TRANSISTOR		
Q110,111			DTC124ES	TRANSISTOR		
Q112			DTA124ES	TRANSISTOR		
Q113,114		*	KTC2874B	TRANSISTOR		
Q115-118			2SK364(BL)	FET		
Q119-124			KSC1845F	TRANSISTOR		
Q125-130			KSA992F-X	TRANSISTOR		
Q131,132			KSC1845F	TRANSISTOR		
△ Q133,134		*	TRAITR2P	TRANSISTOR J501150000030		1
△ Q133,134			TRAIT5P	TRANSISTOR J581050000010		3
△ Q135,136			TRAITR2N	TRANSISTOR J503150000030		1
△ Q135,136		*	TRAIT5N	TRANSISTOR J583050000010		3

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia 1 : KAF-1030
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai) S : SILVER 3 : KAF-3030R
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas △ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

6

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
Q137,138			KSC1845F	TRANSISTOR		
Q139			2SC1740SR	TRANSISTOR		
Q140			2SA933S	TRANSISTOR		
Q141,142			KSC1845F	TRANSISTOR		
Q143			2SC1740SR	TRANSISTOR		
△ Q144			KTC2026	TRANSISTOR		
Q145			KSC2316-Y	TRANSISTOR		
△ Q146			KTC2026	TRANSISTOR		
Q147			2SA933S	TRANSISTOR		
△ Q148		*	KTA1046Y	TRANSISTOR		
Q149			2SA933S	TRANSISTOR		
△ Q150			KSC2316-Y	TRANSISTOR		3
Q151			DTC124ES	TRANSISTOR		
Q152			2SK246GR	FET		
Q153,154		*	KTC2874B	TRANSISTOR		
Q155,156			2SC2878	TRANSISTOR		
Q157			DTC124ES	TRANSISTOR		
Q159			2SK246GR	FET		
Q160,161			DTC143TS	TRANSISTOR		
Q162			2SA933S	TRANSISTOR		
Q163			DTC124ES	TRANSISTOR		
Q258			DTC124ES	TRANSISTOR		1
Q346			DTC114ES	TRANSISTOR		1
Q347			DTA114ES	TRANSISTOR		
Q501-503			DTC143TS	TRANSISTOR		
Q504			DTC143TS	TRANSISTOR		3
Q505			DTC143TS	TRANSISTOR		
Q506,507			DTC143TS	TRANSISTOR		1
Q508			DTC143TS	TRANSISTOR		3
Q509-511			DTC143TS	TRANSISTOR		
Q512			DTC114TS	TRANSISTOR		
Q513			DTC143TS	TRANSISTOR		
Q520			KTC1027Y	TRANSISTOR		3
Q550			2SC1740SR	TRANSISTOR		3
REMO501		*	W02-2765-08	MODULE,REMO E940000140020		3
ZD101			MTZJ5.1B	ZENER DIODE		
ZD102			MTZJ5.6B	ZENER DIODE		
ZD103			MTZJ5.1B	ZENER DIODE		
ZD340,341			MTZJ7.5B	ZENER DIODE		1
ZD343			MTZJ5.6B	ZENER DIODE		3

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia 1 : KAF-1030
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai) S : SILVER 3 : KAF-3030R
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas △ indicates safety critical components .

PARTS LIST

KAF-1030/3030R

KAF-1030/3030R

SPECIFICATIONS

KAF-3030R

Rated output power	
(DIN) 1 kHz	
at 8 Ω	50 W + 50 W
at 4 Ω	75 W + 75 W
(IEC/DIN) from 63 Hz to 12.5 kHz, 0.7 % T.H.D.	
at 8 Ω	50 W + 50 W
at 4 Ω	75 W + 75 W
Effective output power	
Except UK and Europe	
(EIAJ) 1 kHz, 10 % T.H.D.	
at 8 Ω	60 W + 60 W
at 4 Ω	90 W + 90 W
Damping factor	42 (50 Hz)
Total harmonic distortion	
.....	0.02 % (20 Hz ~ 20 kHz, 25 W, 8 Ω)
.....	0.002 % (1 kHz, 25 W, 8 Ω)
Frequency response (IHF'66)	
Adv. DA / CD DIRECT	5 Hz ~ 100 kHz, +0 dB, -3 dB
Adv. DA / CD, MD/CD-R,	
TUNER, TAPE, AUX	5 Hz ~ 60 kHz, +0 dB, -3 dB
PHONO 'RIAA' response ... 20 Hz ~ 20 kHz, +1.0 dB, -1.0 dB	
Maximum input level	
PHONO (MM)	100 mV, 0.5 % T.H.D. at 1 kHz
Signal to noise ratio	
PHONO (MM)	72 dB (IHF'66)
Adv. DA / CD, MD/CD-R,	
TUNER, TAPE, AUX	100 dB (IHF'66)
Adv. DA / CD DIRECT	102 dB (IHF'66)
PHONO (MM)	60 dB (DIN, 50 mW output)
Adv. DA / CD, MD/CD-R,	
TUNER, TAPE, AUX	60 dB (DIN, 50 mW output)
Input sensitivity/impedance	
PHONO (MM)	2.5 mV/33 k Ω
Adv. DA / CD, MD/CD-R,	
TUNER, TAPE, AUX	200 mV/47 k Ω
Tone control	
BASS	± 6 dB (at 100 Hz)
TREBLE	± 6 dB (at 10 kHz)
Output level/impedance	
MD/CD-R REC, TAPE REC,	200 mV/2.7 k Ω
General	
Power consumption	
AC outlet	
SWITCHED	2 (total 200 W max.)
UNSWITCHED	1 (100 W max.)
Dimensions	
W: 440 mm	
H: 95 mm	
D: 400 mm	
Weight (net)	
7.8 kg	

KAF-1030

Rated output power	
(DIN) 1 kHz	
at 8 Ω	40 W + 40 W
at 4 Ω	60 W + 60 W
(IEC/DIN) from 63 Hz to 12.5 kHz, 0.7 % T.H.D.	
at 8 Ω	40 W + 40 W
at 4 Ω	60 W + 60 W
Effective output power	
Except UK and Europe	
(EIAJ) 1 kHz, 10 % T.H.D.	
at 8 Ω	55 W + 55 W
at 4 Ω	75 W + 75 W
Damping factor	42 (50 Hz)
Total harmonic distortion	
.....	0.02 % (20 Hz ~ 20 kHz, 20 W, 8 Ω)
.....	0.002 % (1 kHz, 20 W, 8 Ω)
Frequency response (IHF'66)	
SOURCE DIRECT	5 Hz ~ 85 kHz, +0 dB, -3 dB
CD, MD/CD-R,	
TUNER, TAPE, AUX	5 Hz ~ 60 kHz, +0 dB, -3 dB
PHONO 'RIAA' response ... 20 Hz ~ 20 kHz, +1.0 dB, -1.0 dB	
Maximum input level	
PHONO (MM)	100 mV, 0.5 % T.H.D. at 1 kHz
Signal to noise ratio	
PHONO (MM)	72 dB (IHF'66)
CD, MD/CD-R, TUNER, TAPE, AUX	100 dB (IHF'66)
PHONO (MM)	60 dB (DIN, 50 mW output)
CD, MD/CD-R,	
TUNER, TAPE, AUX	60 dB (DIN, 50 mW output)
Input sensitivity/impedance	
PHONO (MM)	2.5 mV/33 k Ω
CD, MD/CD-R, TUNER, TAPE, AUX	200 mV/47 k Ω
Tone control	
BASS	± 6 dB (at 100 Hz)
TREBLE	± 6 dB (at 10 kHz)
LOUDNESS control	
VOLUME at -30 dB level	+9 dB (at 100 Hz)
Output level/impedance	
MD/CD-R REC, TAPE REC,	200 mV/2.7 k Ω
General	
Power consumption	
Dimensions	
W: 440 mm	
H: 95 mm	
D: 400 mm	
Weight (net)	
7.2 kg	



1. KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.
2. The full performance may not be exhibited in extremely cold locations (below freezing).

KAF-1030/3030R

Note:

Component and circuit are subject to modification to insure best operation under differing local conditions. This manual is based on Europe (E) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION

14-6,Dogenzaka 1-chome, Shibuya-ku, Tokyo, 150-8501 Japan

KENWOOD SERVICE CORPORATION

P.O BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O BOX 55-2791, Piso 6 plaza Chase, Cl. 47 y Aquilino de la Guardia Panama, Republic de Panama

KENWOOD ELECTRONICS BRASIL LTDA.

Av. Moema, 170-17°, Andar-Cobertura "B", Ed. Maximum Service Center, 04077-020 Moema, São Paulo-SP-Brasil

KENWOOD ELECTRONICS U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB., United Kingdom

KENWOOD ELECTRONICS BELGUM N.V.

Meachelsesteenweg 418, B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS FRANCE S.A.

13 Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129, Milano, Italy

KENWOOD IBÉRICA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

(A.C.N. 001 499 074)

16 Giffnock Avenue, North Ryde, N.S.W. 2113, Australia

KENWOOD ELECTRONICS (HONG KONG) LTD.

Unit 3712-3724, Level 37, Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong N.T., Hong Kong

KENWOOD ELECTRONICS GULF FZE

P.O.Box 61318, Jebel Ali, Dubai, U.A.E.

KENWOOD ELECTRONICS SINGAPORE PTE LTD.

No. 1 Genting Lane #02-02, KENWOOD Building, Singapore, 349544

KENWOOD ELECTRONICS (MALAYSIA) SDN BHD.

#4.01 Level 4, Wisma Academy Lot 4A, Jalan 19/1 46300 Petaling Jaya Selangor Darul Ehsan Malaysia

KENWOOD ELECTRONICS (THAILAND) CO., LTD.

2019 New Pechburi Road, Bangkapi, Huaykwang, Bangkok, 10320 Thailand